arXiv:0811.0656v3 [cond-mat.mtrl-sci] 14 May 2010

Effect of gas flow on electronic transport in a DNA-decorated carbon nanotube

P. Poonam and N. Deo*

Department of Physics and Astrophysics,
University of Delhi, Delhi 110007, India.

Abstract

We calculate the two time current correlation function using the experimental data of the current-time characteristics of the Gas-DNA-decorated carbon nanotube field effect transistor. The pattern of the correlation function is a measure of the sensitivity and selectivity of the sensors and suggest that these gas flow sensors may also be used as DNA sequence detectors. The system is modelled by a one-dimensional tight-binding Hamiltonian and we present analytical calculations of quantum electronic transport for the system using the time-dependent nonequilibrium Green's function formalism and the adiabatic expansion. The zeroth and first order contribution to the current $J^{(0)}(\bar{t})$ and $J^{(1)}(\bar{t})$ is calculated where $J^{(0)}(\bar{t})$ is the Landauer formula. The formula for the time-dependent current is then used to compare the theoretical results with the experiment.

PACS numbers: 73.63.-b, 73.63.Fg, 73.23.-b, 73.40.-c

---

*Electronic address: ndeo@physics.du.ac.in

Study of electronic transport through mesoscopic or nanoscale systems is one of the most active areas of today's research. Electronic transport in these systems is divided into stationary and time-dependent phenomena. The stationary transport for nonequilibrium systems has been studied by many authors [1]. Meir and Wingreen [2] reformulated the ideas given in [1] (and references therein) using the Keldysh approach to study interacting mesoscopic systems which led to a Landauer formula. Later, Meir, Wingreen and Jauho introduced a general formulation for time-dependent transport through mesoscopic (nano) structures [3]. Using this formalism theoretical understanding of experiments [3, 4] has been presented for time-dependent voltages.

In this work, we derive an expression for the current for gas flow over a single-stranded DNA (ss-DNA)-decorated single wall carbon nanotube (SWCN) connected to the source (S) and drain (D) contacts maintained at zero gate voltage $V_g = 0\text{V}$ and a fixed bias voltage $V_b = 100\text{mV}$. For this system, time-dependence arises as different number of gas molecules flow over and interact with the DNA-decorated SWCN at each time $\bar{t}$ s for an exposure time of 50 s. This results in the hopping integral and on-site energy to be functions of time which leads to a time-dependent Hamiltonian for the SWCN. Thus, to deal with gas flow over nanostructures the time-dependent nonequilibrium Green's function (NEGF) formalism is well suited. The choice of the model is motivated by the experiment [5] which finds the current-time characteristics of the ss-DNA-decorated p-type SWCN-FET sensors upon odour and air exposures. The odours are dimethyl methylphosphonate (DMMP), 2, 6 dinitrotoluene (DNT), trimethylamine (TMA), propionic acid (PA), and methanol [5]. The characteristic curves show fluctuations in the current response. We calculate these fluctuations in terms of the two time current correlation function.

I. TWO TIME CURRENT CORRELATION FUNCTION

We begin with the calculation of the two time current correlation function using the experimental data [5]. The two time current correlation function $C(\bar{t})$ is defined as

$$C(\bar{t}) = \frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t}) I_i(\bar{t}+\delta\bar{t}) - \frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t}) \times \frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t}+\delta\bar{t}), \tag{1}$$

where $I_i(\bar{t}) = I_i(\bar{t})/I_0$ is the normalized source-drain current at time $\bar{t}$ in the i^{th} gas exposure cycle. Let us consider $\delta\bar{t} = 1$ s and n is the total number of exposure cycles.

The correlation function calculated here is different from that shown in our previous work [6] equation (2) and for other mesoscopic systems [7] equation (5.57) and [8]. The second term in equation (2) of [6] and equation (5.57) of [7] is $< I_i(t) >^2$ and $< g >^2$ respectively, where $< \cdots >$ denotes the ensemble average. Instead of $< I_i(t) >^2$, here we use $\left(\frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t})\right) \times \left(\frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t}+\delta\bar{t})\right)$ as the average $\frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t})$ is different from the average $\frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t}+\delta\bar{t})$, because for each $\delta\bar{t}$ there is contribution to the current from another base. In the system (Gas+DNA+SWCN complex), at $\delta\bar{t} = \bar{t}_1$ s the gas molecule interacts with a base (say, cytosine) attached to the carbon atom and for the next $\delta\bar{t}$ the gas molecule interacts with another base thymine (say), so for each $\delta\bar{t}$ the current changes as the Gas-DNA-base complex changes upon gas exposure. This is not the case for the usual disordered mesoscopic systems considered in experiments, where both the averages $\frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t})$ and $\frac{1}{n}\sum_{i=1}^{n} I_i(\bar{t}+\delta\bar{t})$ are the same ([7] equation(5.57) and [8]).

We observe distinct patterns for the different odours and sequences, figure 1. This indicates selective recognition of each odour by the sensors. In particular, the pattern of the correlation function for methanol with sequence 1, figure 1(c), is different from methanol with sequence 2, figure 1(d). This shows that the correlation function is sensitive to different gases and DNA sequences. Hence, the two time current correlation function is a measure of the sensitivity and selectivity of the DNA-decorated SWCN sensors. The correlation function suggests that these gas flow sensors may also be used as DNA sequence detectors where the pattern of correlation functions may be used as a benchmark for the particular chemical signal encoded in a DNA sequence. Figure 1 shows highly fluctuating data, these fluctuations are due to the structure of the DNA sequences as shown in [6].

II. TIGHT-BINDING MODEL AND NONEQUILIBRIUM GREEN'S FUNCTION

The experiment [5] with gas exposure indicates that the sensor response ($\Delta I/I_0$) is zero for pristine SWCN and as DNA is applied on SWCN the sensor response changes. Since the ss-DNA sequence is a linear chain we can model the ss-DNA-decorated SWCN using a one-dimensional tight-binding Hamiltonian where the electron hops between two carbon atoms attached to the DNA bases with different hopping integrals and on-site energies at different times. In our formalism, the effect of the gas flow and DNA functionalization in the channel can be modelled by a time-dependent potential. Here, we model the effect by the time-dependent hopping integrals and on-site energy in a self-consistence manner [9].

Now we investigate the electronic transport through the model system using the time-dependent NEGF formalism. For this, a tight-binding model of the SWCN and Gas-DNA complex is set up. In this microscopic tight-binding model, there are two approximations: the first approximation is the tight-binding between the carbon atoms of SWCN and the second is the interaction between the carbon atoms of SWCN and Gas-DNA-base complex [6, 10], where we assume that the carbon atom interacts with the nearest-neighbor DNA base.

Figure 2 shows the schematic diagram of the chosen model system, i.e., Gas-DNA-SWCN sandwiched between S and D contacts. Here, we present a simplified picture of the complex model and its operation. A_1, B_1, A_2, B_2, $\cdots$, X_i represent the carbon atoms, where X can be A or B and the index i=1, 2, $\cdots$, M is the number of the carbon atom. The first and the last carbon atoms, A_1 and X_M are connected to S and D. The bases cytosine, thymine etc. of an ss-DNA sequence 2 [5] (shown by ovals) are attached to different carbon atoms and the circle represents the gas molecule. The arrow indicates the path of transmission.

The operational principle of the model is based on the changes in the electrical properties due to DNA bases and gas molecules adsorbed on the SWCN surface. Initially, the DNA sequence is applied on the SWCN, e.g., the cytosine base attaches to the carbon atom B_1 and thymine base attaches to A_2 and so on. When the gas is exposed to the sensor for duration of 50 s then at time $\bar{t}_1$ s the gas molecule interacts with cytosine base through vdW forces and/or mutual polarization [6, 10]. As a result, the electron hops from the π orbital of one carbon atom A_1 to the neighboring carbon atom B_1 and the tunnelling of the electron from A_1 to B_1 is an elastic process with the corresponding integral referred to as the hopping integral $\gamma_{11}(\bar{t}_1)$. Then, the electron hops from B_1 to A_2 with the hopping integral $\gamma_{12}(\bar{t}_1)$, and from A_2 to B_2 with $\gamma_{22}(\bar{t}_1) = \gamma_0$, where γ_0 is the hopping integral without the gas and DNA. Hence, the hopping integrals between other carbon atoms $\gamma_{ij}(\bar{t}_1)$ are also γ_0, figure 2(a). The time scale of electron transport through the SWCN is far less than the experimental time scale of the gas flow, therefore the electron sees a steady state at $\bar{t}_1$ s. Similarly, at $\bar{t}_2$ s another gas molecule interacts with the thymine base attached to the carbon atom A_2, resulting in the hopping integrals $\gamma_{11}(\bar{t}_2)$, $\gamma_{12}(\bar{t}_2)$, $\gamma_{22}(\bar{t}_2)$, and other $\gamma_{ij}(\bar{t}_2)$=γ_0, figure 2(b). In this case, the electron sees a steady state at $\bar{t}_2$ with $\gamma_{ij}(\bar{t}_2)$ different from $\gamma_{ij}(\bar{t}_1)$ as the bases interacting with the gas molecules are different. In a similar way at time $\bar{t}_M$, the time when the gas molecule interacts with the last base of the DNA sequence attached to the carbon atom, the hopping integrals are $\gamma_{11}(\bar{t}_M)$, $\gamma_{12}(\bar{t}_M)$, $\cdots$, $\gamma_{pq}(\bar{t}_M)$, figure 2(c). Hence, we find the hopping integrals as well as the on-site energy change with the time $\bar{t}$ at which the gas molecules trigger the different bases of the DNA sequence attached to the SWCN and depend on the DNA bases, gases, and geometry of attachment of the bases and gases to the SWCN. Because of the time-dependent hopping integral and on-site energy the relevant Green's functions for the SWCN (G_{C}) are also time-dependent.

As the experimental time scale of the gas flow is larger than the time of electron transport inside the SWCN ($\sim 10^{-16}$s) one can express the leading transport properties of the metal-SWCN-metal system in terms of the Green's function given by $G(\epsilon, \bar{t}) = [\epsilon - H(\bar{t})]^{-1}$, where $\epsilon = \varepsilon \pm \mathrm{i}\eta$ with $\mathrm{i}\eta$ an infinitesimal imaginary term and $H(\bar{t})$ is the Hamiltonian at time $\bar{t}$, using the time-dependent NEGF formalism, an adiabatic expansion in the slow time variable $\bar{t} = \frac{t+t'}{2}$ and Fourier transforming with respect to the fast variable $(t - t')$ [1, 11]. The time-dependent nonequilibrium retarded and advanced Green's functions for the SWCN can be derived as $G^{r,a}_{\mathrm{C}}(\epsilon, \bar{t}) = [\epsilon - H_{\mathrm{C}}(\bar{t}) - \Sigma_{\mathrm{S}}(\epsilon, \bar{t}) - \Sigma_{\mathrm{D}}(\epsilon, \bar{t})]^{-1}$, where $\Sigma_{\mathrm{S}}(\epsilon, \bar{t}) = h^{\dagger}_{\mathrm{SC}} g_{\mathrm{S}}(\epsilon, \bar{t}) h_{\mathrm{SC}}$ and $\Sigma_{\mathrm{D}}(\epsilon, \bar{t}) = h_{\mathrm{CD}} g_{\mathrm{D}}(\epsilon, \bar{t}) h^{\dagger}_{\mathrm{CD}}$ are the self-energy terms due to metallic contacts with $g_{\{\mathrm{S,D}\}}(\epsilon, \bar{t}) = [\epsilon - H_{\{\mathrm{S,D}\}}(\bar{t})]^{-1}$ the Green's functions of the contacts. This is done by expanding the Green's functions up to linear order in the slow variable $\bar{t}$ using the adiabatic expansion [1, 11]:

$G^{r,a}(t - t', \bar{t}) = G^{(0)r,a}(t - t', \bar{t}) + G^{(1)r,a}(t - t', \bar{t})$, where $G^{(0)r,a}(t - t', \bar{t}) = G^{r,a}(t - t', \bar{t})|_{\bar{t}=t}$ and $G^{(1)r,a}(t - t', \bar{t}) = (\frac{t'-t}{2}) \frac{\partial G^{r,a}}{\partial \bar{t}}(t - t', \bar{t})|_{\bar{t}=t}$ are the zeroth and first order Green's functions. Taking the Fourier transform with respect to the fast variable $(t - t')$ the Green's functions become $G^{r,a}(\varepsilon, \bar{t}) = G^{(0)r,a}(\varepsilon, \bar{t}) + G^{(1)r,a}(\varepsilon, \bar{t})$. We assume that the coupling to the contacts effectively gives rise to a finite imaginary term in the self-energies which is larger than $\mathrm{i}\eta$ [12] at all times. Therefore, we drop the term $\mathrm{i}\eta$ in the Green's function matrix for the SWCN. The coupling functions are considered to be energy independent $\Gamma_{\mathrm{S/D}}(t, t') = \tau(t, t') \times \exp[\mathrm{i} \int_{\mathrm{t'}}^{\mathrm{t}} \mathrm{dt_1} \Delta_{\mathrm{S/D}}(\mathrm{t_1})]$ with $\tau(t, t') = 2\pi \sum_{\alpha \epsilon \mathrm{S,D}} \rho_\alpha V_{\alpha,n}(t) V^{*}_{\alpha,n}(t')$ [3]. These functions can also be expanded using the adiabatic expansion as $\Gamma_{\{\mathrm{S,D}\}}(t - t', \bar{t}) = \Gamma^{(0)}_{\{\mathrm{S,D}\}}(t - t', \bar{t}) + \Gamma^{(1)}_{\{\mathrm{S,D}\}}(t - t', \bar{t})$ with $\Gamma^{(0)}_{\{\mathrm{S,D}\}}(t - t', \bar{t}) = \Gamma_{\{\mathrm{S,D}\}}(t - t', \bar{t})|_{\bar{t}=t} = \Gamma^{(0)}_{\{\mathrm{S,D}\}}(\bar{t}) = 2\pi \sum_{\alpha \epsilon \mathrm{S,D}} \rho_\alpha V_{\alpha,n}(t) V^{*}_{\alpha,n}(t)$ and $\Gamma^{(1)}_{\{\mathrm{S,D}\}}(\bar{t}) = (t' - t)\overline{\Delta}(\bar{t}) = (t' - t) \left[\frac{1}{2} \frac{\partial \tau(t - t', \bar{t})}{\partial \bar{t}}|_{\bar{t}=t} - \mathrm{i}\Gamma^{(0)}_{\{\mathrm{S,D}\}}(\bar{\mathrm{t}}) \Delta_{\mathrm{S/D}}(0)\right]$ as the zeroth and first order coupling functions. Using these nonequilibrium Green's functions and coupling functions we can identify the zeroth and first order contribution to the current: $J(\bar{t}) = J^{(0)}(\bar{t}) + J^{(1)}(\bar{t})$.

We explicitly calculate the Green's function (G_{C}) for the Hamiltonian corresponding to figure 2. In the matrix form, the Hamiltonian of the system can be divided into three blocks [13] corresponding to the semiconducting SWCN and the two metallic contacts S and D

$$H(\bar{t}) = \begin{pmatrix} H_{\mathrm{S}} & h_{\mathrm{SC}} & 0 \\ h_{\mathrm{SC}}^{\dagger} & H_{\mathrm{C}} & h_{\mathrm{CD}} \\ 0 & h_{\mathrm{CD}}^{\dagger} & H_{\mathrm{D}} \end{pmatrix}, \tag{2}$$

where $H_{\{\mathrm{S,D}\}}$ are the contact Hamiltonians and H_{C} is the time-dependent tight-binding Hamiltonian for the SWCN with matrix elements: $H_{A_iA_i}{=}\varepsilon_{Ai}(\bar{t})$, $H_{B_iB_i}{=}\varepsilon_{Bi}(\bar{t})$ and $H_{A_iB_i}{=}H_{B_iA_i}{=}\gamma_{ii}(\bar{t})$ [14, 15], $H_{B_iA_{i+1}}{=}H_{A_{i+1}B_i}{=}\gamma_{i,i+1}(\bar{t})$, and the rest of the off diagonal elements are zero. The coupling matrices h_{SC} and h_{CD} will be non zero only for nearest-neighbors. Assuming the tight-binding model and using the above Hamiltonian the zeroth order time-dependent retarded Green's function $G^{(0)r}$ can be written in an $M \times M$ matrix form as

$$G_{\mathrm{C}}^{(0)r}(\varepsilon,\bar{t}) = \begin{pmatrix} \varepsilon - \varepsilon_{A_1}(\bar{t}) - \Sigma_{\mathrm{S}}(\bar{t}) & \gamma_{11}(\bar{t}) & & & & \\ \gamma_{11}(\bar{t}) & \varepsilon - \varepsilon_{B_1}(\bar{t}) & \gamma_{12}(\bar{t}) & & & \\ & \gamma_{12}(\bar{t}) & \varepsilon - \varepsilon_{A_2}(\bar{t}) & \ddots & & \\ & & \ddots & \ddots & \ddots & \\ & & & \ddots & \ddots & \gamma_{pq}(\bar{t}) \\ & & & & \gamma_{pq}(\bar{t}) & \varepsilon - \varepsilon_{X_i}(\bar{t}) - \Sigma_{\mathrm{D}}(\bar{t}) \end{pmatrix}^{-1}. \tag{3}$$

III. RESULTS AND DISCUSSION

The zeroth order Green's functions ($\mathrm{G}^{(0)<}$, $\mathrm{G}^{(0)\mathrm{r}}$, and $\mathrm{G}^{(0)\mathrm{a}}$) lead to the zeroth order current $J^{(0)}$, which is the Landauer formula [1, 2, 9] with the slow time variable $\bar{t}$. The Landauer formula is derived using the adiabatic expansion for the Green's functions and the coupling functions in the expression of the time-dependent current equation (6) of [3] and is found to be

$$J^{(0)}(\bar{t}) = \frac{e}{\hbar}\int \frac{\mathrm{d}\varepsilon}{2\pi}\, Tr(\Gamma_{\mathrm{S}}^{(0)}(\bar{t})G_{\mathrm{C}}^{(0)r}(\varepsilon,\bar{t})\Gamma_{\mathrm{D}}^{(0)}(\bar{t})G_{\mathrm{C}}^{(0)a}(\varepsilon,\bar{t}))[f_{\mathrm{S}}(\varepsilon) - f_{\mathrm{D}}(\varepsilon)]. \tag{4}$$

The transmission function of the system is identified as $T(\varepsilon,\bar{t}) = Tr(\Gamma^{(0)}_{\mathrm{S}}(\bar{t})G^{(0)r}_{\mathrm{C}}(\varepsilon,\bar{t})\Gamma^{(0)}_{\mathrm{D}}(\bar{t})G^{(0)a}_{\mathrm{C}}(\varepsilon,\bar{t}))$, where $G^{(0)r,a}_{\mathrm{C}}(\varepsilon,\bar{t})$ are the zeroth order retarded and advanced Green's functions of the SWCN at $\bar{t}$ and $f_{\{\mathrm{S,D}\}}(\varepsilon)$ are the Fermi distribution functions in the source and drain contacts. The coupling functions are related to the self-energies by the relationship $\Gamma_{\{\mathrm{S,D}\}}(\bar{t}) = \mathrm{i}[\Sigma_{\{\mathrm{S,D}\}}(\bar{\mathrm{t}}) - \Sigma^{\dagger}_{\{\mathrm{S,D}\}}(\bar{\mathrm{t}})]$, where we have considered self-energies to be energy independent. $\Sigma_{\{\mathrm{S,D}\}}(\bar{t})$ contains both real and imaginary parts.

To calculate the transmission function, we have assumed that only the first element of the $\Gamma^{(0)}_{\mathrm{S}}(\bar{t})(\Sigma_{\mathrm{S}}(\bar{t}))$ matrix and the last element of the $\Gamma^{(0)}_{\mathrm{D}}(\bar{t})(\Sigma_{\mathrm{D}}(\bar{t}))$ matrix are present. The rest of the elements of matrices are considered to be zero. Then, the transmission function depends only on one off diagonal element of G_{C}: $T(\varepsilon,\bar{t}) = \Gamma^{(0)}_{\mathrm{S},11}(\bar{t})G^{(0)}_{\mathrm{C1M}}(\varepsilon,\bar{t})\Gamma^{(0)}_{\mathrm{D,MM}}(\bar{t})G^{(0)*}_{\mathrm{C1M}}(\varepsilon,\bar{t})$.

To get an explicit expression for the current, we consider linear response [12, 13]. In linear response, equation (4) becomes $J^{(0)}(\bar{t}) = \frac{e}{\hbar}\int\frac{\mathrm{d}\varepsilon}{2\pi}T(\varepsilon,\bar{t})\delta[f(\varepsilon-\mu_{\mathrm{S}}) - f(\varepsilon-\mu_{\mathrm{D}})]$ where $\mu_{\{\mathrm{S,D}\}}$ are the chemical potentials associated with the source and drain contacts. This equation then can be written as $J^{(0)}(\bar{t}) = \frac{e}{\hbar}T(\varepsilon_f,\bar{t})[\mu_{\mathrm{S}} - \mu_{\mathrm{D}}]$ as $\delta[f(\varepsilon-\mu_{\mathrm{S}}) - f(\varepsilon-\mu_{\mathrm{D}})] = (\mu_{\mathrm{S}} - \mu_{\mathrm{D}})(-\frac{\partial f}{\partial\varepsilon})$ and $(-\frac{\partial f}{\partial\varepsilon}) = \delta(\varepsilon_f - \varepsilon)$ [12].

In the experiment [5], there are two DNA sequences: sequence 1 with 21 bases and sequence 2 with 24 bases. Hence, we have two matrices, one is a 23 × 23 matrix and the other is a 26 × 26 matrix [16]. For the above Hamiltonian matrix and using $\Gamma^{(0)}_{\mathrm{S},11}(\bar{t}) = -2Im(\Sigma_{\mathrm{S},11}(\bar{t})) = -2Im\Sigma_{\mathrm{S}}(\bar{t})$ and $\Gamma^{(0)}_{\mathrm{D,MM}}(\bar{t}) = -2Im(\Sigma_{\mathrm{D,MM}}(\bar{t})) = -2Im\Sigma_{\mathrm{D}}(\bar{t})$, the general expression for the transmission function of a SWCN decorated with DNA sequence 1 (2) and gas is given by

$$T(\varepsilon_f,\bar{t}) = \frac{4\ Im\Sigma_{\mathrm{S}}(\bar{t})\ Im\Sigma_{\mathrm{D}}(\bar{t})\ \gamma^2_{11}(\bar{t})\gamma^2_{12}(\bar{t})\cdots\gamma^2_{pq}(\bar{t})}{|G_{\mathrm{C}}{}^{(0)r}(\varepsilon_f,\bar{t})|^2_{M\times M}}, \tag{5}$$

where $p = q = M/2$ for even M and $p = (M-1)/2$ and $q = (M+1)/2$ for odd M[17]. Equation (5) gives an explicit formula for the transmission function in terms of γ_{ij} and ε_{X_i} indicating the dependence of the transmission function and hence the current on the hopping integrals and the on-site energies which are functions of time $\bar{t}$.

We also derive the first order contribution to the time-dependent current using equation (6) of [3]:

$$
\begin{aligned}
J^{(1)}_{\mathrm{S/D}}(\bar{t}) \;=\; & -\frac{e}{\hbar} ImTr\Bigg[\Gamma^{(0)}_{\mathrm{S/D}}(\bar{t})\Bigg\{\sum_{\mathrm{S,D}}\int \frac{\mathrm{d}\varepsilon}{2\pi} f_{\mathrm{S/D}}(\varepsilon)\Bigg\{\Bigg(\frac{\partial}{\partial\varepsilon}\{G^{(0)r}G^{(0)a}\}\Bigg)\overline{\Delta}(\bar{t}) \\
& + \mathrm{i}\Bigg(\mathrm{G}^{(0)\mathrm{r}}\mathrm{G}^{(1)\mathrm{a}} + \mathrm{G}^{(1)\mathrm{r}}\mathrm{G}^{(0)\mathrm{a}}\Bigg)\Gamma^{(0)\mathrm{S/D}}(\bar{\mathrm{t}})\Bigg\}\Bigg\}\Bigg] \\
& - \frac{e}{\hbar} ImTr\Bigg[\int \frac{\mathrm{d}\varepsilon}{2\pi} f_{\mathrm{S/D}}(\varepsilon)\Bigg\{\Gamma^{(0)\mathrm{S/D}}(\bar{t})G^{(1)r} - \mathrm{i}\overline{\Delta}(\bar{\mathrm{t}})\frac{\partial \mathrm{G}^{(0)\mathrm{r}}}{\partial\varepsilon}\Bigg\}\Bigg], \qquad (6)
\end{aligned}
$$

where we have used $\frac{1}{\mathrm{i}}\frac{\partial}{\partial\varepsilon}G^{(0)r,a}(\varepsilon,\bar{t}) = \int_{-\infty}^{\infty}\mathrm{d(t-t')e^{i\varepsilon(t-t')}(t-t')G^{(0)r,a}(t-t',\bar{t})}$ and the dependence of $G^{(0)r,a}$ and $G^{(1)r,a}$ on ε and $\bar{t}$ has been suppressed. An expression for $G^{(1)r,a}(\varepsilon,\bar{t})$ can be explicitly calculated from $G^{r,a}(t-t',\bar{t})$ and equation (3) using the formula: $G^{(1)r,a}(\varepsilon,\bar{t}) = -(\frac{t'-t}{2})G^{(0)r,a}(\varepsilon,\bar{t})\frac{\partial}{\partial\bar{t}}G^{-1r,a}(t-t',\bar{t})|_{\bar{t}=t}G^{(0)r,a}(\varepsilon,\bar{t})$.

To analyze the sensor response in terms of the hopping integrals and on-site energy, let us consider the model parameters γ_{ij} and ε_{X_i} to have the form $\gamma_{ij}(\Delta a_{cc}(\bar{t})) = \gamma_0\mathrm{exp}(\mp\Delta \mathrm{a_{cc}}(\bar{\mathrm{t}})/\mathrm{a_0})$ and $\varepsilon_{X_i}(\Delta a_{cc}(\bar{t})) = \varepsilon_0\mathrm{exp}(\mp\Delta \mathrm{a_{cc}}(\bar{\mathrm{t}})/\mathrm{a_0})$ where $-(+)$ sign appears when a_{cc} decreases (increases). Here γ_0 and ε_0 are the hopping integral and on-site energy without the gas and DNA with $a_0 = 0.33A^0$. $\gamma_{ij}(\Delta a_{cc}(\bar{t}))$ and $\varepsilon_{X_i}(\Delta a_{cc}(\bar{t}))$ are the modified parameters when the nearest-neighbor carbon-carbon distance a_{cc} changes by Δa_{cc} as a function of time $\bar{t}$ due to the interaction of gas molecules with the DNA-decorated SWCN at each $\bar{t}$ s. As the experimental observations [5] show that the sensor response to PA differs in sign and magnitude from the response to other gases, the decreased sensor response ($\Delta I/I_0$, table 1[5]) to all the gases except PA is due to $-\Delta a_{cc}(\bar{t})$ which enhances $\gamma_{ij}(\Delta a_{cc}(\bar{t}))$ and hence the electron current resulting in a decrease in the hole current (here we have assumed only the contribution of γ_{ij} and neglect ε_{X_i} in (5)). The increased sensor response to PA is because of $+\Delta a_{cc}(\bar{t})$ which reduces $\gamma_{ij}(\Delta a_{cc}(\bar{t}))$ and the electron current and therefore increases the hole current.

To demonstrate that the theory and experiment are in agreement we explicitly calculate the values for $\Delta J^{(0)}(\bar{t})/J_0$ ($\Delta I/I_0$ of [5]) for a 7×7 matrix (for simplicity of the calculation) using equations (4), (5) and the form for γ_{ij} given in the above paragraph, for methanol with DNA sequence 2. Here J_0 is the current without the odour. The table 1 given below gives the values for different parameters considered in the calculation. Figure 3 is the plot between the sensor response, calculated using the parameters given in table 1, and the time. This shows a good match between the experimental and theoretical results. Hence, the formula reproduces the current characteristics of the experiment [5]. The results can be used to calculate the two time current correlation function and compared with the plots calculated from the experiment [5], figure 1 and will be reported elsewhere.

Using $J(\bar{t})$ the charge transfer per second can be calculated as $\Delta Q(\bar{t}_i) = J(\bar{t}_i) - J(\bar{t}_{i-1})$. These are some predictions of the model for the experiment. Using the expressions for $G^{(0)}$ and $G^{(1)}$, we find that $J^{(1)}(\bar{t})$ changes with $\gamma_{ij}(\bar{t})$, $\varepsilon_{X_i}(\bar{t})$, $\Sigma_{\mathrm{S,D}}(\bar{t})$, $\overline{\Delta}(\bar{t})$ and $\frac{\partial\gamma_{ij}(\bar{t})}{\partial\bar{t}}$, $\frac{\partial\varepsilon_{X_i}(\bar{t})}{\partial\bar{t}}$, $\frac{\partial\Sigma_{\mathrm{S,D}}(\bar{t})}{\partial\bar{t}}$ [18] while $J^{(0)}(\bar{t})$ changes with $\gamma_{ij}(\bar{t})$, $\varepsilon_{X_i}(\bar{t})$ and $\Sigma_{\mathrm{S,D}}(\bar{t})$.

IV. CONCLUSIONS

In conclusion, the two time current correlation function for the experimental data [5] has been calculated and for this system, analytical calculations of quantum electronic transport have been presented by setting up a tight-binding model and applying the time-dependent NEGF formalism. The Green's functions and coupling functions have been expanded using the adiabatic expansion in the slow variable and the Fourier transform has been taken with respect to the fast variable for the Green's functions. With the help of the Green's functions and coupling functions the zeroth and first order contributions to the current have been investigated.

Equations (1), (4)-(6) carry the principle results of this paper. The correlation function equation (1) is a measure of the sensitivity and selectivity of the DNA-decorated SWCN sensors and suggest that these gas flow sensors may also be used as DNA sequence detectors where the pattern of correlation functions may be used as a benchmark for the particular chemical signal encoded in a DNA sequence. Equation (4) presents the zeroth order time-dependent current, which is the Landauer formula that depends on the slow time variable $\bar{t}$. The dependence of the transmission function and hence the current on $\gamma_{ij}(\bar{t})$ and $\varepsilon_{X_i}(\bar{t})$ has been shown by an explicit formula, equation (5). Equation (6) shows the first order contribution to the current for the experiment [5], which is proportional to the zeroth and first order Green's functions. The formula for the time-dependent current is then used to compare the theoretical results with the experiment. An expression for the charge transfer per second is obtained using the current.

The numerical and analytical approaches used in this work can be applied to a broad range of systems where gas flows over nano-structures doped with different chemical and biological molecules. This will provide a method for the study of time-dependent electronic transport in low dimensional disordered systems with gas flow.

V. ACKNOWLEDGMENTS

We would like to thank Professors A. T. Charlie Johnson, M. Muller, A. Silva, V. Falko, J. Robinson, and Deepak Kumar for helpful discussions and suggestions. We also thank the University Grant Commission (UGC) and University Scheme to Strengthen R & D Doctoral Research Programme for financial support.

---

[1] Haug H J W and Jauho A P 2008 *Quantum Kinetics in Transport and Optics of Semiconductors* (Berlin Heidelberg New York: Springer)

[2] Meir Y and Wingreen N S 1992 *Phys. Rev. Lett.* **68** 2512

[3] Wingreen N S, Jauho A P and Meir Y 1993 *Phys. Rev. B* **48** 8487

[4] Kienle D and Leonard F 2009 *Phys. Rev. Lett.* **103** 026601

[5] Staii C, Johnson Jr A T, Chen M and Gelperin A 2005 *Nano Lett.* **5** 1774

[6] Poonam P and Deo N 2008 *Sens. Actuators B Chem.* **135** 327

[7] Imry Y 1997 *Introduction to Mesoscopic Physics* (Oxford: Oxford University Press)

[8] Lee P A 1986 *Physica* **140A** 169

Lee P A and Ramakrishnan T V 1985 *Rev. Mod. Phys.* **57** 287

Lee P A and Stone A D 1985 *Phys. Rev. Lett.* **55** 1622

Al'tshuler B L, Lee P A and Webb R A *Mesoscopic Phenomena in Solids* 1991 (New York: North-Holland)

[9] Datta S 2007 *Quantum Transport: Atom to Transistors* (Cambridge: Cambridge University Press)

[10] Meng S, Maragakis P, Papaloukas C and Kaxiras E 2007 *Nano Lett.* **7** 45

[11] Hernandez A R, Pinheiro F A, Lewenkopf C H and Mucciolo E R 2009 *Phys. Rev. B* **80** 115311

[12] Datta S 1995 *Electronic Transport in Mesoscopic Systems* (Cambridge: Cambridge University Press)

[13] Chen Y R, Zhang L and Hybertsen M S 2007 *Phys. Rev. B* **76** 115408

[14] Saito R, Dresselhaus G and Dresselhaus M S 1998 *Physical Properties of Carbon Nanotubes* (London: Imperical College Press)

[15] Falko V 2006 *Quantum transport of chiral electrons in graphene I* Lecture note in "College on Physics of Nano-Devices" (The Abdus Salam International Centre for Theoretical Physics)

[16] Since the first and the last carbon atoms are connected to the source and drain contacts.

[17] Note: equation (5) for $\gamma_{ij} = \gamma_0$ and $\varepsilon_{X_i} = \varepsilon_f = 0$ reduces to equations (10) and (11) in [13].

[18] For $\overline{\Delta}(\bar{t}) = 0$, equation (6) for $J^{(1)}(\bar{t})$ depends on $G^{(1)r,a}$ and hence is small compared to $J^{(0)}(\bar{t})$.

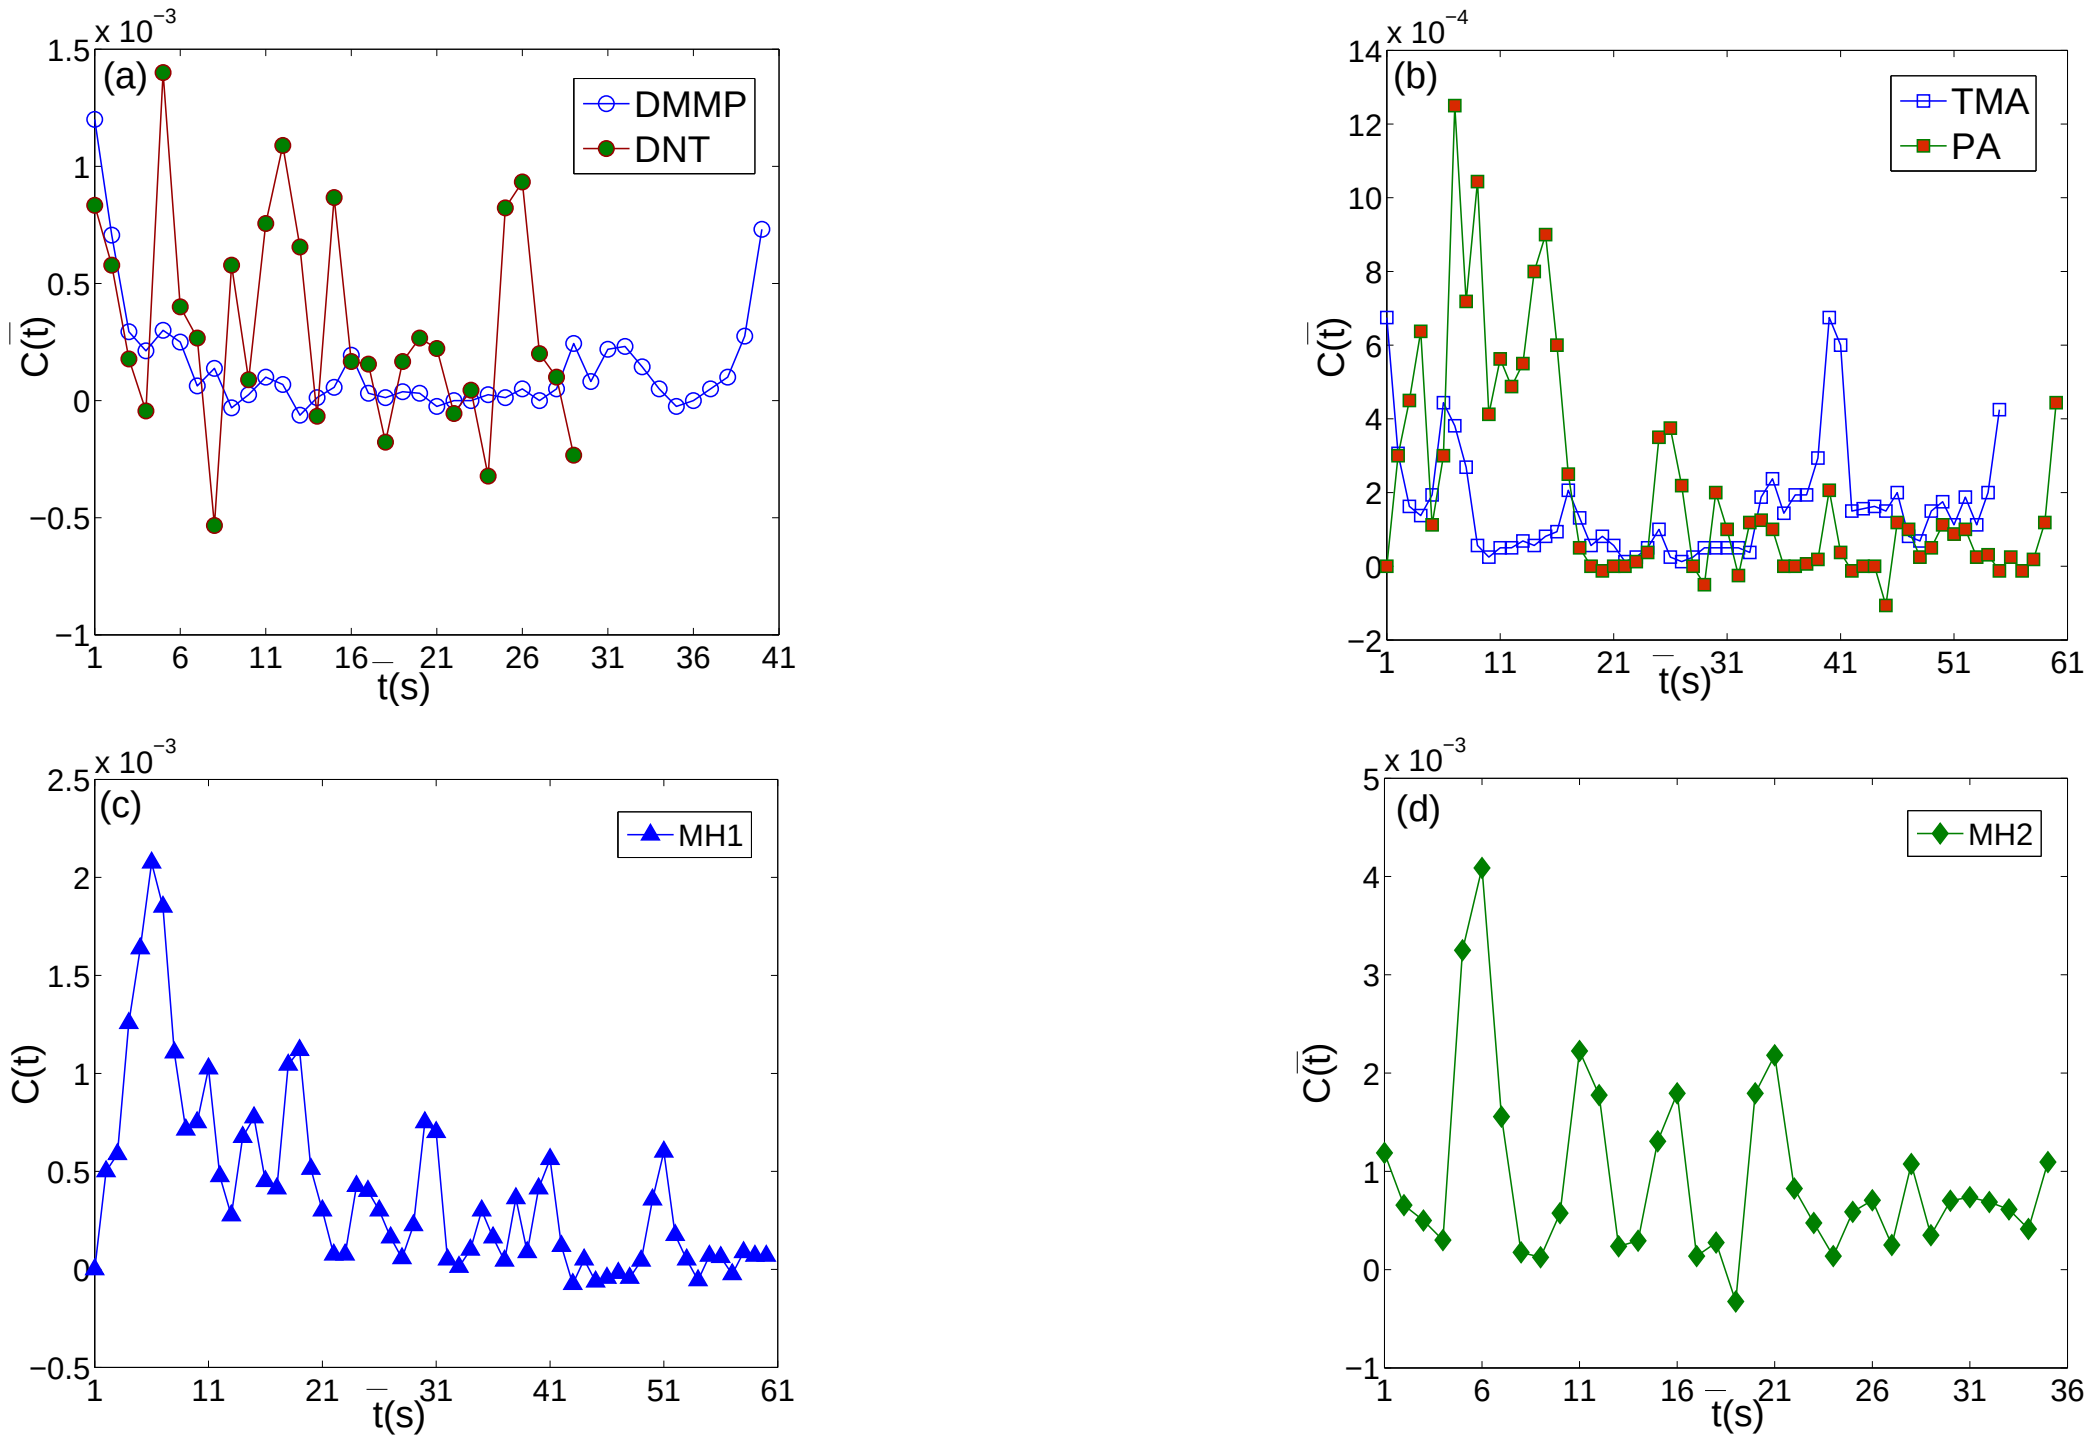

FIG. 1: The two time current correlation function $C(\bar{t})$ versus $\bar{t}$(s) for (a) DMMP + sequence 2 and DNT + sequence 1 (b) TMA + sequence 2 and PA + sequence 1 (c) methanol + sequence 1 and (d) methanol + sequence 2.

TABLE I: Values for different parameters used in the calculation of the current with γ_0=2.5eV for methanol with DNA sequence 2. The units of ε_f and Δa_{cc} are eV and Å respectively.

$\bar{t}(s)$	$\bar{t_1}$	$\bar{t_2}$	$\bar{t_3}$	$\bar{t_4}$	$\bar{t_5}$
$\Delta J^{(0)}(\bar{t})/J_0$	-0.0328	-0.0703	-0.0824	-0.0776	-0.1093
$\varepsilon_f(\bar{t})$	0.01	0.1	1.4	1.6	2.8
$\Delta a_{A_1B_1}(\bar{t})$	-0.004	-0.004	-0.004	-0.004	-0.004
$\Delta a_{B_1A_2}(\bar{t})$	-0.006	-0.012	-0.012	-0.012	-0.012
$\Delta a_{A_2B_2}(\bar{t})$		-0.006	-0.012	-0.012	-0.012
$\Delta a_{B_2A_3}(\bar{t})$			-0.004	-0.008	-0.008
$\Delta a_{A_3B_3}(\bar{t})$				-0.006	-0.012
$\Delta a_{B_3A_4}(\bar{t})$					-0.006

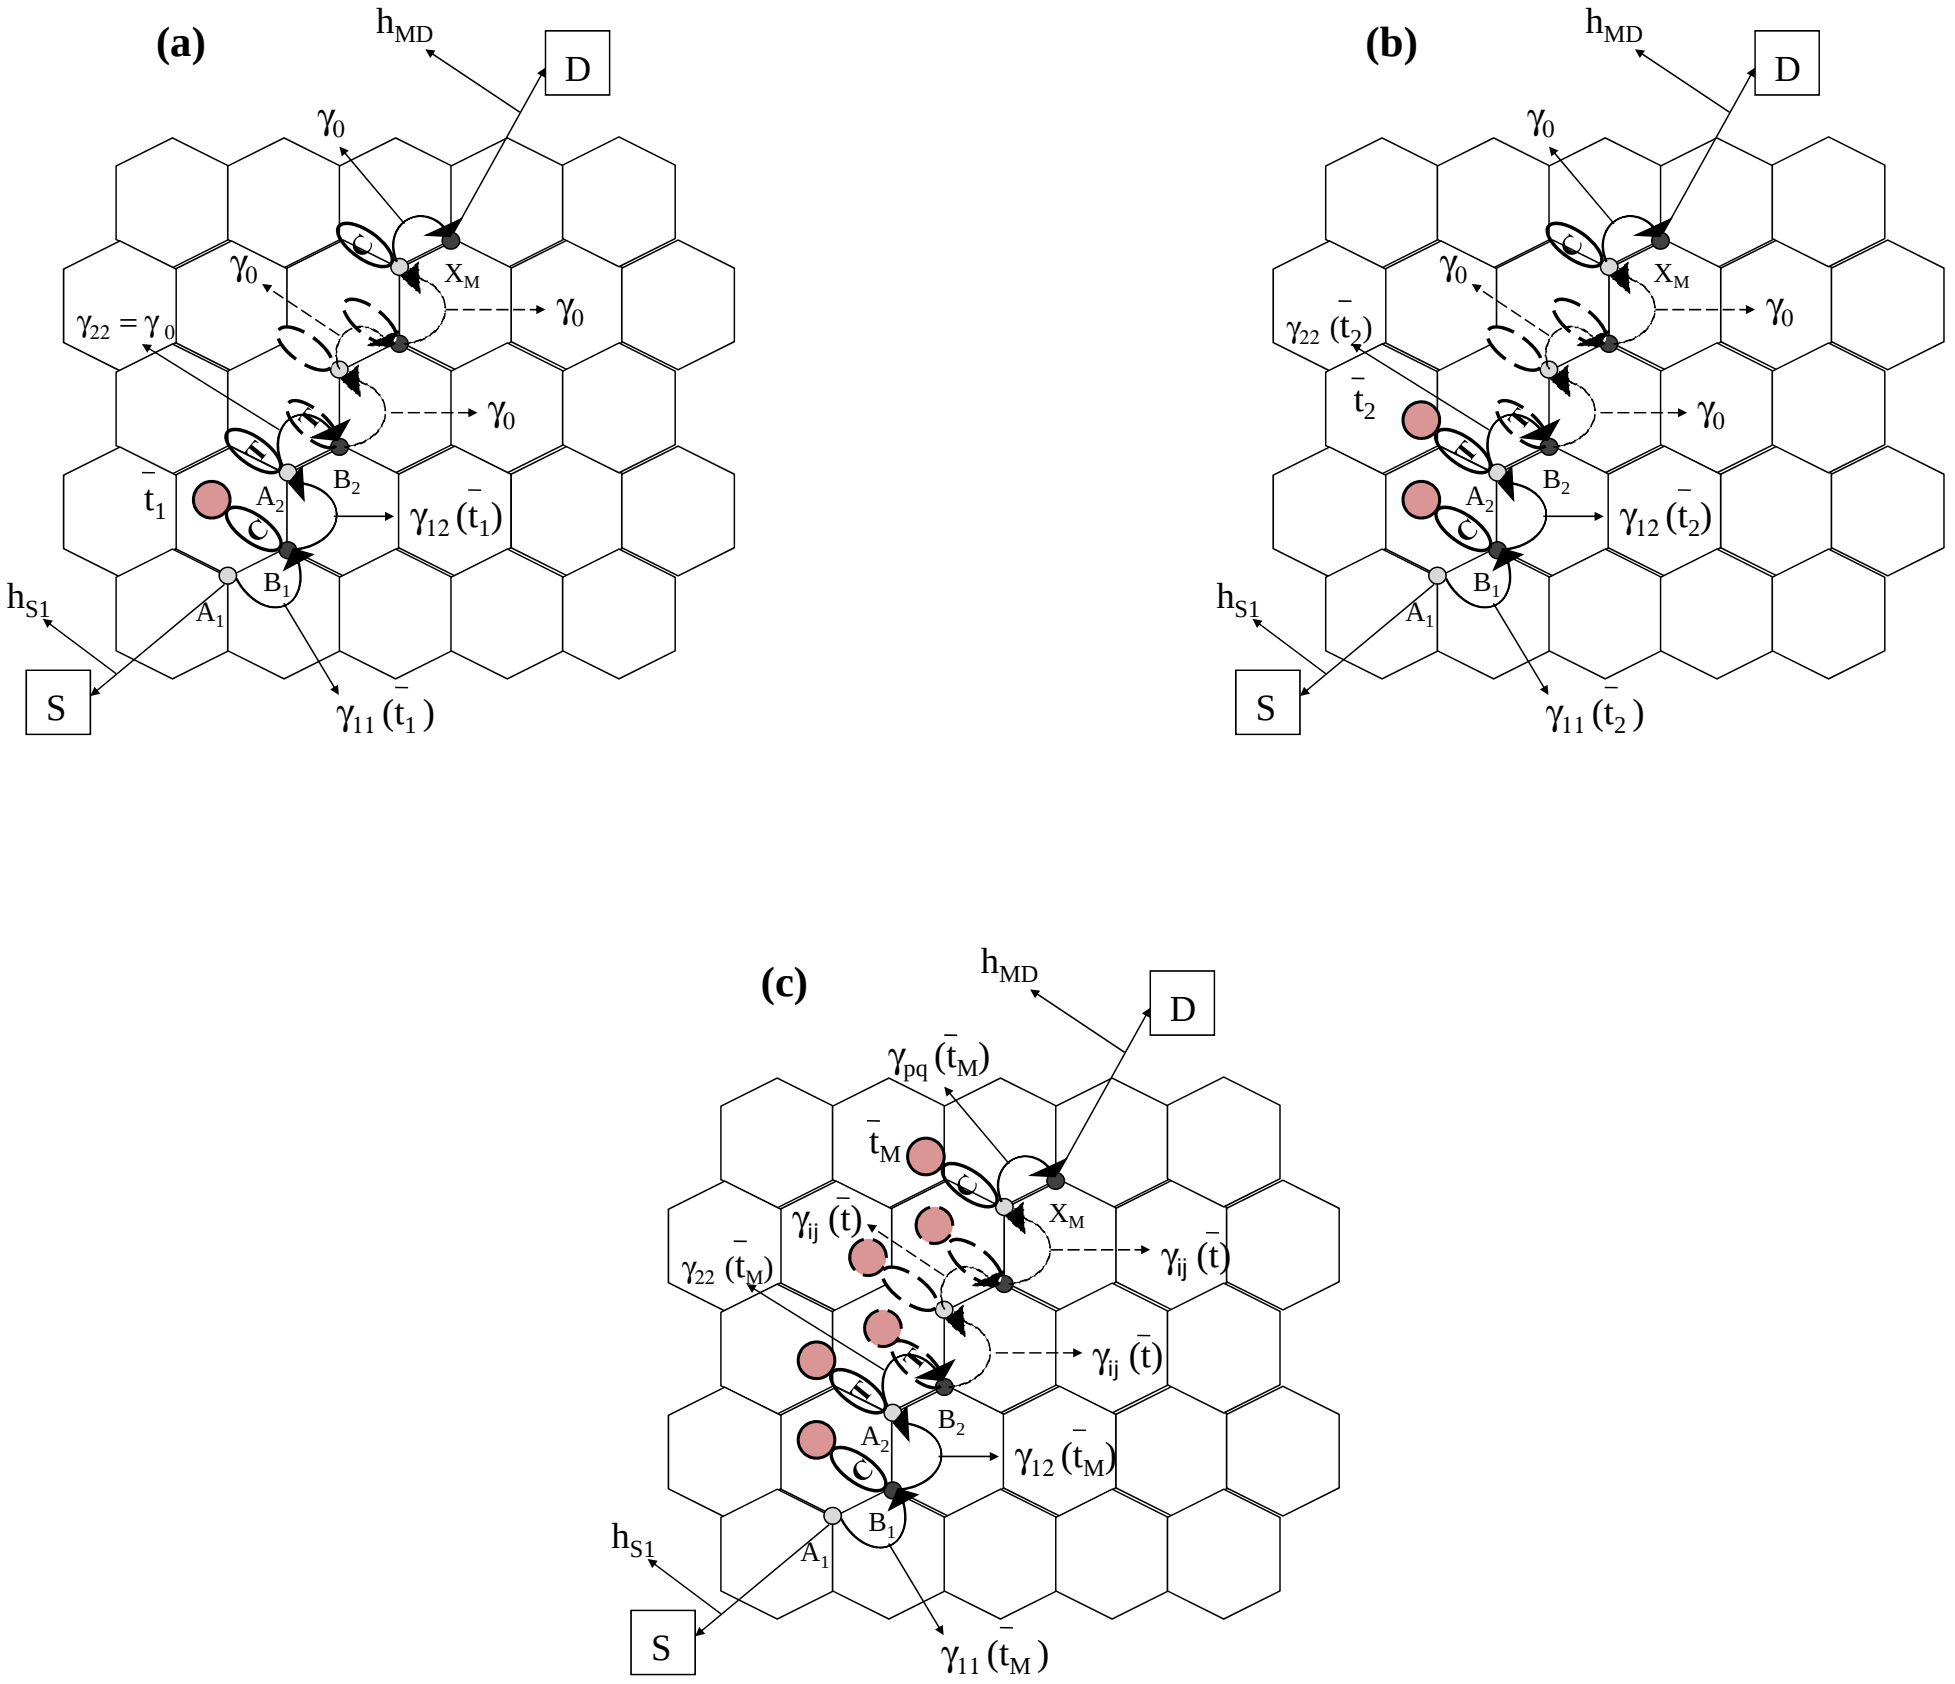

FIG. 2: Portion of an unwrapped SWCN. $\gamma_{ij}(\bar{t})$ are the hopping integrals indicating hopping between different carbon atoms A_i and B_i at time $\bar{t}$. Here, $\bar{t} = \bar{t}_1, \bar{t}_2, \cdots, \bar{t}_M$. γ_0 represents the hopping integral in the absence of the gas and DNA. $h_{\mathrm{S}1}$ represents the coupling between the source contact and the first carbon atom A_1 while $h_{M\mathrm{D}}$ is the coupling between the last carbon atom X_M and the drain contact. The ovals represent the DNA bases cytosine, thymine etc. while the circles indicate the gas molecules.

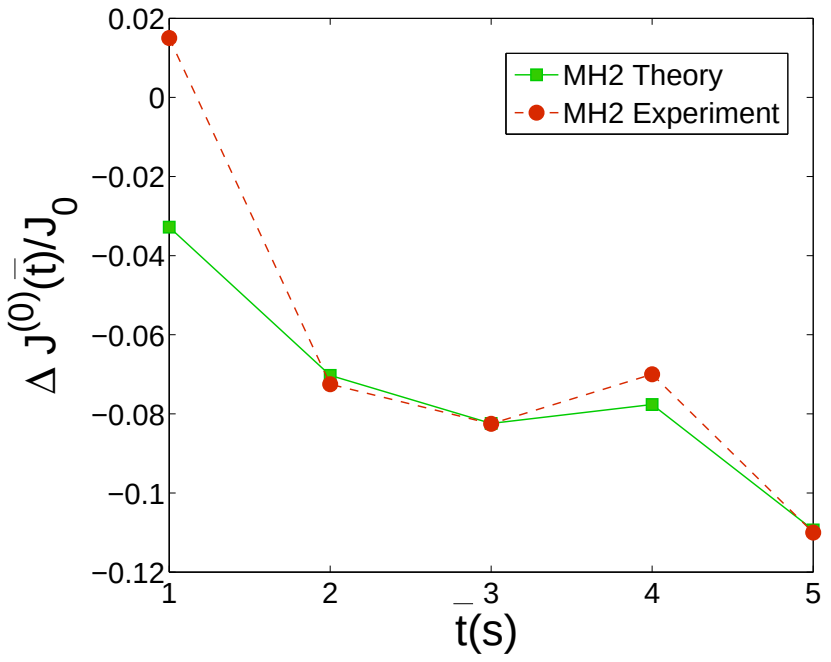

FIG. 3: The sensor response $\Delta J^{(0)}(\bar{t})/J_0$ versus time $\bar{t}$(s) for methanol with DNA sequence 2. This plot shows agreement between the theory and experiment. Here, at $\bar{t}_1$ the theoretical and experimental values of the current are different which is due to experimental error as this is the time when the gas molecule starts replacing the air molecule. We have found similar results for methanol with the other DNA sequence 1. Experimental data is used from [5] with permission from American Chemical Society (2010).